

POLYURETHANE IMPACT BARS


AEG's Impact Bars are cast polyurethane 1000mm in length and is both chemically and mechanically bonded to an extruded aluminium profile for quick, safe and secure installation.

Specifically designed to extend equipment and structural life by absorbing and dampening the impact force of large falling aggregate.

They are installed in chutes, hoppers or bins where the falling velocity of the product stream can be controlled and lessens the wear rate in critical areas.

Impact bars are lightweight and reduce the incidence of injuries during installation. Due to the light weight, fewer maintenance staff are required for installation.

The T-bolt fastening method is quick, safe and secure and eliminates gas cutting and welding methods.

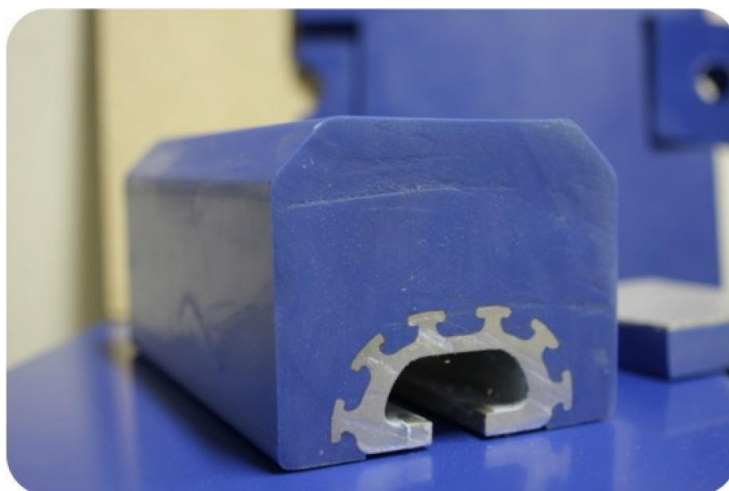

Fixing Method:

Integrated Aluminium Rail
Sliding T bolt with washer (sold separately)

Materials:

Hot cast polyurethane 80-85 Shore A
Extruded Aluminium profile

Applications:

Chutes
Bins & hoppers
ROM tips
Skips
Transfer points
Head chutes
Mills
Scrubber Screens