

SPRAY NOZZLES



Advanced Engineering Group's spray nozzles work in both high and low water pressure as their operating range is from 30 to 300kPa (4 to 40 PSI).

The nozzles give a sharply defined, fan-shaped water jet providing efficient washing. Our nozzles are ideal for washing, dust control and de-slurrying applications.



White/Grey	3.00mm
Green	5.00mm
Blue	7.00mm
Yellow	9.0mm
Red	11.0mm

*All have 3/4" BSP thread

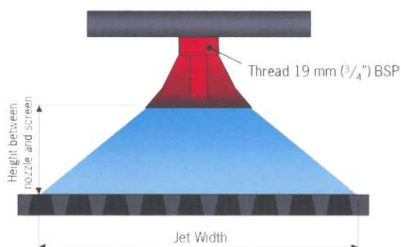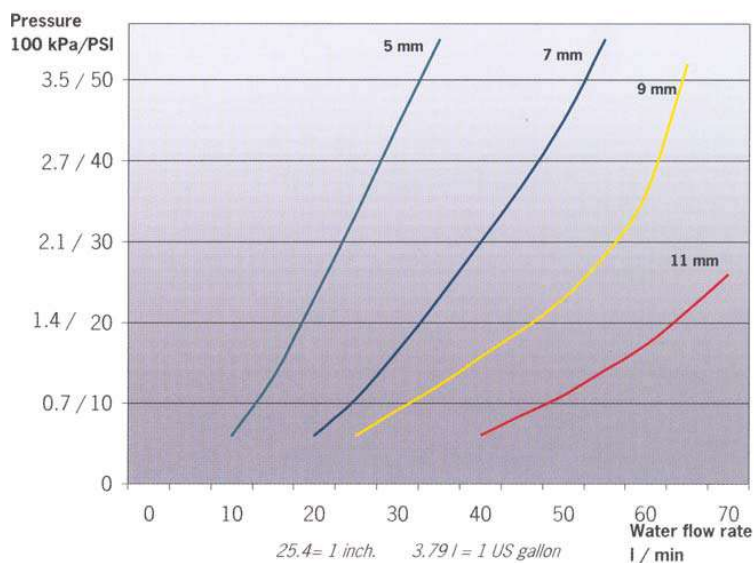

Height between spray nozzle and screen, mm (inch)	Nozzle Size, mm (inch)							
	5mm (3/16)		7mm (1/4)		9mm (3/8)		11mm (9/16)	
	Pressure, 100kPa (PSI)							
	1.5 [22]	2.5 [36]	1.5 [22]	2.5 [36]	1.5 [22]	2.5 [36]	1.5 [22]	2.5 [36]
	Jet Width mm (inch)							
200 [8]	600 [24]	700 [27]	600 [24]	800 [31]	600 [24]	800 [31]	600 [24]	800 [31]
300 [12]	750 [30]	850 [33]	800 [31]	800 [31]	800 [31]	1000 [39]	800 [31]	1000 [39]
400 [16]	900 [36]	1000 [39]	1000 [39]	1200 [47]	1000 [39]	1200 [47]	1000 [39]	1200 [47]